




**GUARD-M8**

# Heat-Pump Guard

## - Security Cages

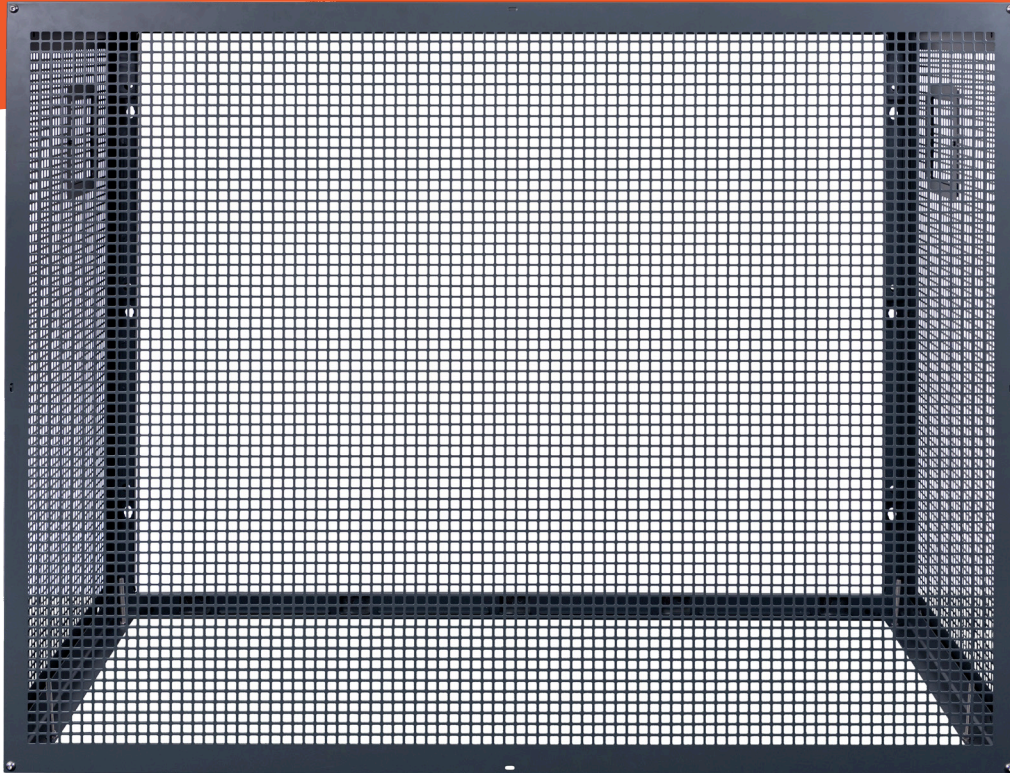

**Deter theft & vandalism**



**Ensure adequate air-circulation**



**Easy installation**



**High quality powder coated  
hot-dipped galvanised steel**





**Modern RAL7016  
Anthracite Grey**






## Designed for Flexible Mounting and Easy Access

Hinged isolator access doors on both sides (when installed in landscape orientation).

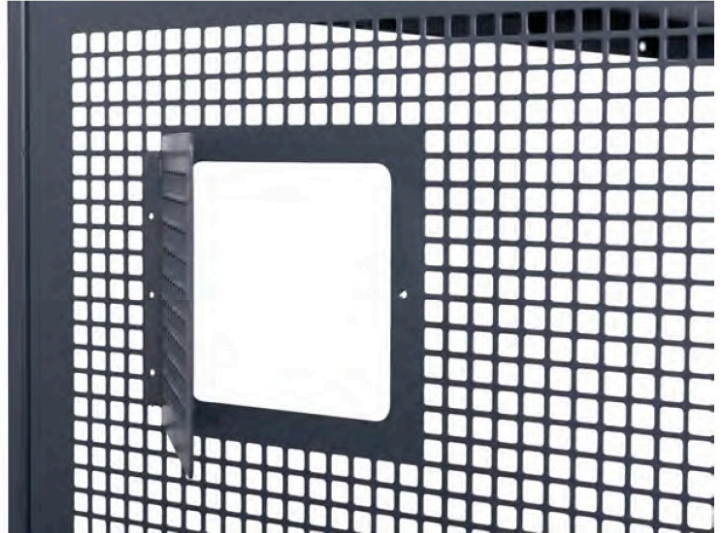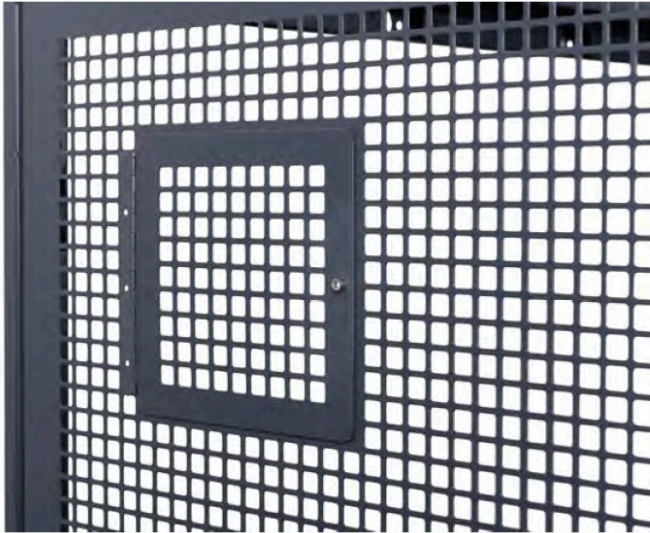


Stainless steel adjustable foot pack for extra stability in low-wall installations and freestanding floor mounting on uneven surfaces.

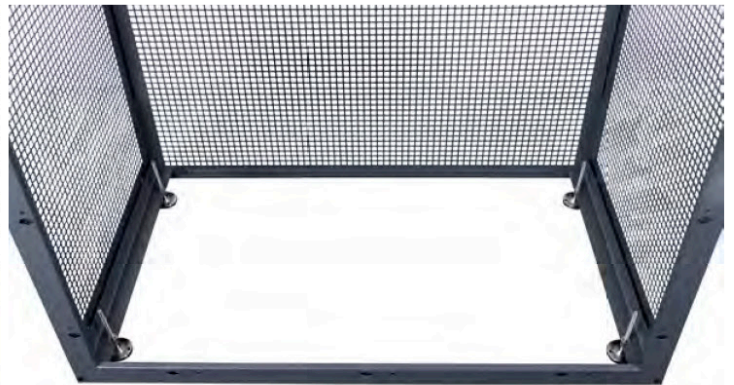

## Key Strengths



Portrait or landscape orientation

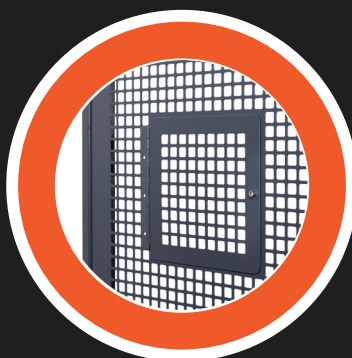

Robust fixing frame with multiple fixing points for every installation



Stainless steel fixings

# Safe. Efficient. Durable.


## Construction Materials

<b>Panels:</b>	Rust-resistant hot-dipped galvanised 1.2 mm steel to BS EN ISO 1461:2009
<b>Support Arms:</b>	Extruded aluminium to BS EN 12020-2:2022
<b>Finish:</b>	Electrostatic powder coating to BS EN 12206-1:2004
<b>SKU:</b>	300 - 1420
<b>Fixing Bolts:</b>	Stainless steel AISI 304 to BS EN ISO 3506-5:2022

## Innovative Design:

- Hinged isolator access on both sides
- Multiple fixing points for increased rigidity
- Slide-in side panels for easy assembly
- Can be mounted in portrait or landscape orientation
- Optional floor-mounting frame with extra side panel
- Stainless steel adjustable foot pack for floor and low-wall installation

## Product Dimensions

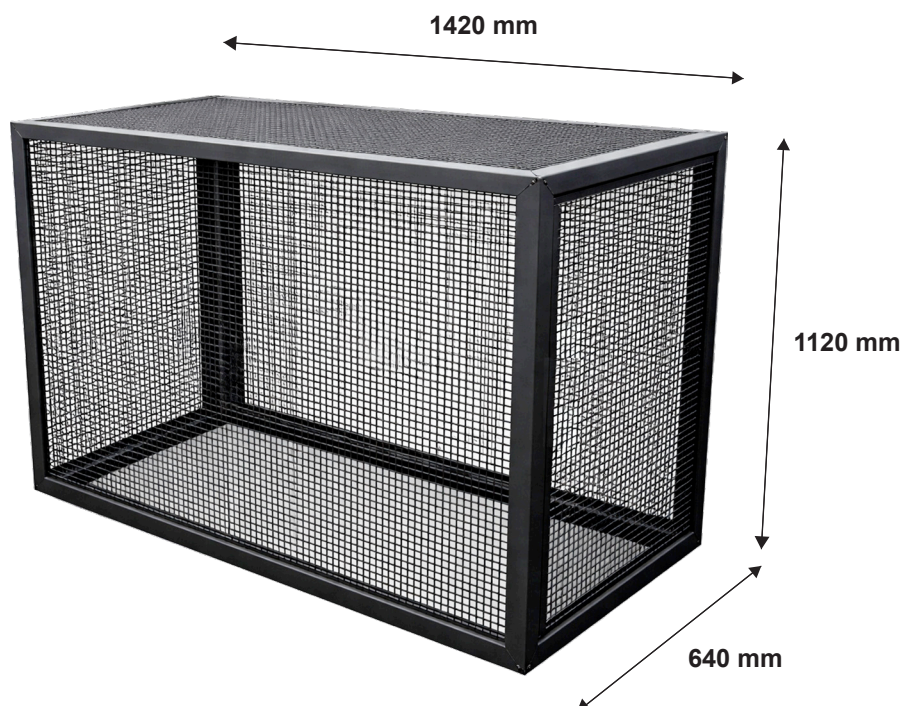

## Warranty Period

Guard-M8 provides a 5-year manufacturer's corrosion warranty against manufacturing defects from the date of purchase. This warranty is conditional upon the product being installed, used and maintained in accordance with the manufacturer's instructions and all applicable local regulations.

This warranty is in addition to and does not affect any statutory rights to which the purchaser may be entitled under applicable UK law.

## Warranty Conditions

Upon delivery, the product packaging should be inspected for transit damage and opened to verify that the product and accessories are complete and in good condition. Claims for transit damage or missing parts must be notified to Guard-M8 within 3 working days of delivery, supported by appropriate images and documentation.

## Warranty Scope

During the warranty period, Guard-M8 will, where a valid warranty claim is confirmed, repair or replace defective components or, where appropriate, the complete unit. Any repair or replacement will be determined following assessment by Guard-M8's appointed engineers.

Warranty coverage for replacement parts or components will expire in line with the original warranty period and will not extend or renew the original warranty duration.

Technical support can be obtained by contacting the customer team at **[sales@Guard-M8.com](mailto:sales@Guard-M8.com)** or calling **+44(0)161 600 4024**.